

CALL 1-800-878-7829 TO PURCHASE PRIVACY SLATS


Discount Fence Supply, Inc.
www.discountfence.com

TOP LOCK SIZE SPECS

SLAT TYPE	SLAT WIDTH	MESH SIZE	WIRE GAUGE	SLATS PER BAG	APPROX. COVERAGE PER BOX
TOP LOCK 2"	1 3/8"	2"	9 OR 11	82	10 LINEAR FEET


INSTALLATION INSTRUCTIONS

Step 1



There is no need to kneel down! Simply insert the slats vertically from top to bottom, *keeping the locking holes on top.*

Step 2

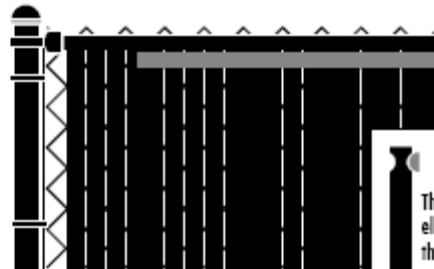

Thread the flexible locking channel horizontally through the notched holes in the slats.

These holes are elliptical to ensure they always stay open for fast and easy threading.

MATERIALS

The Top Lock product is extruded from High Density Polyethylene (HDPE), color pigments and ultra violet (UV) inhibitors, specifically designed to retard the harmful effects of the sun and lengthen the life of the product.

HDPE TECHNICAL PROPERTIES

Property	Value
Melt Index	(.6) A low melt index indicates improved stress and crack resistance.
Density	(.957) Polyethylene ranges anywhere from .914 to .960 in density. A higher density yields maximum stiffness without becoming overly brittle.
Minimum Temp.	(-76° F) Polyethylene stays flexible even at this temperature extreme.
Maximum Temp.	(250° F) Polyethylene does not distort until reaching this temperature.
Tensile Strength	(3,700 psi) Material will not suffer distortion at lesser loads or impacts.

Discount Fence Supply, Inc.
www.discountfence.com